


**Template for
A578 CT/PT
Pocket lock case**

For 1-3/4" thick door, fold here and attach to the door at desired height of Strike location. Mark the positions of holes for Face and Edge bores. For other door thickness, mark the holes on door Face side and draw a light line between 2 locators H1/H2. Center the Edge Template on door Edge for marks, using the 'Horizontal Center Line L' and H1/H2 line drawn as reference for the Height. If mortise for Strike has already been made in metal frame, position template using strike mortise as reference.


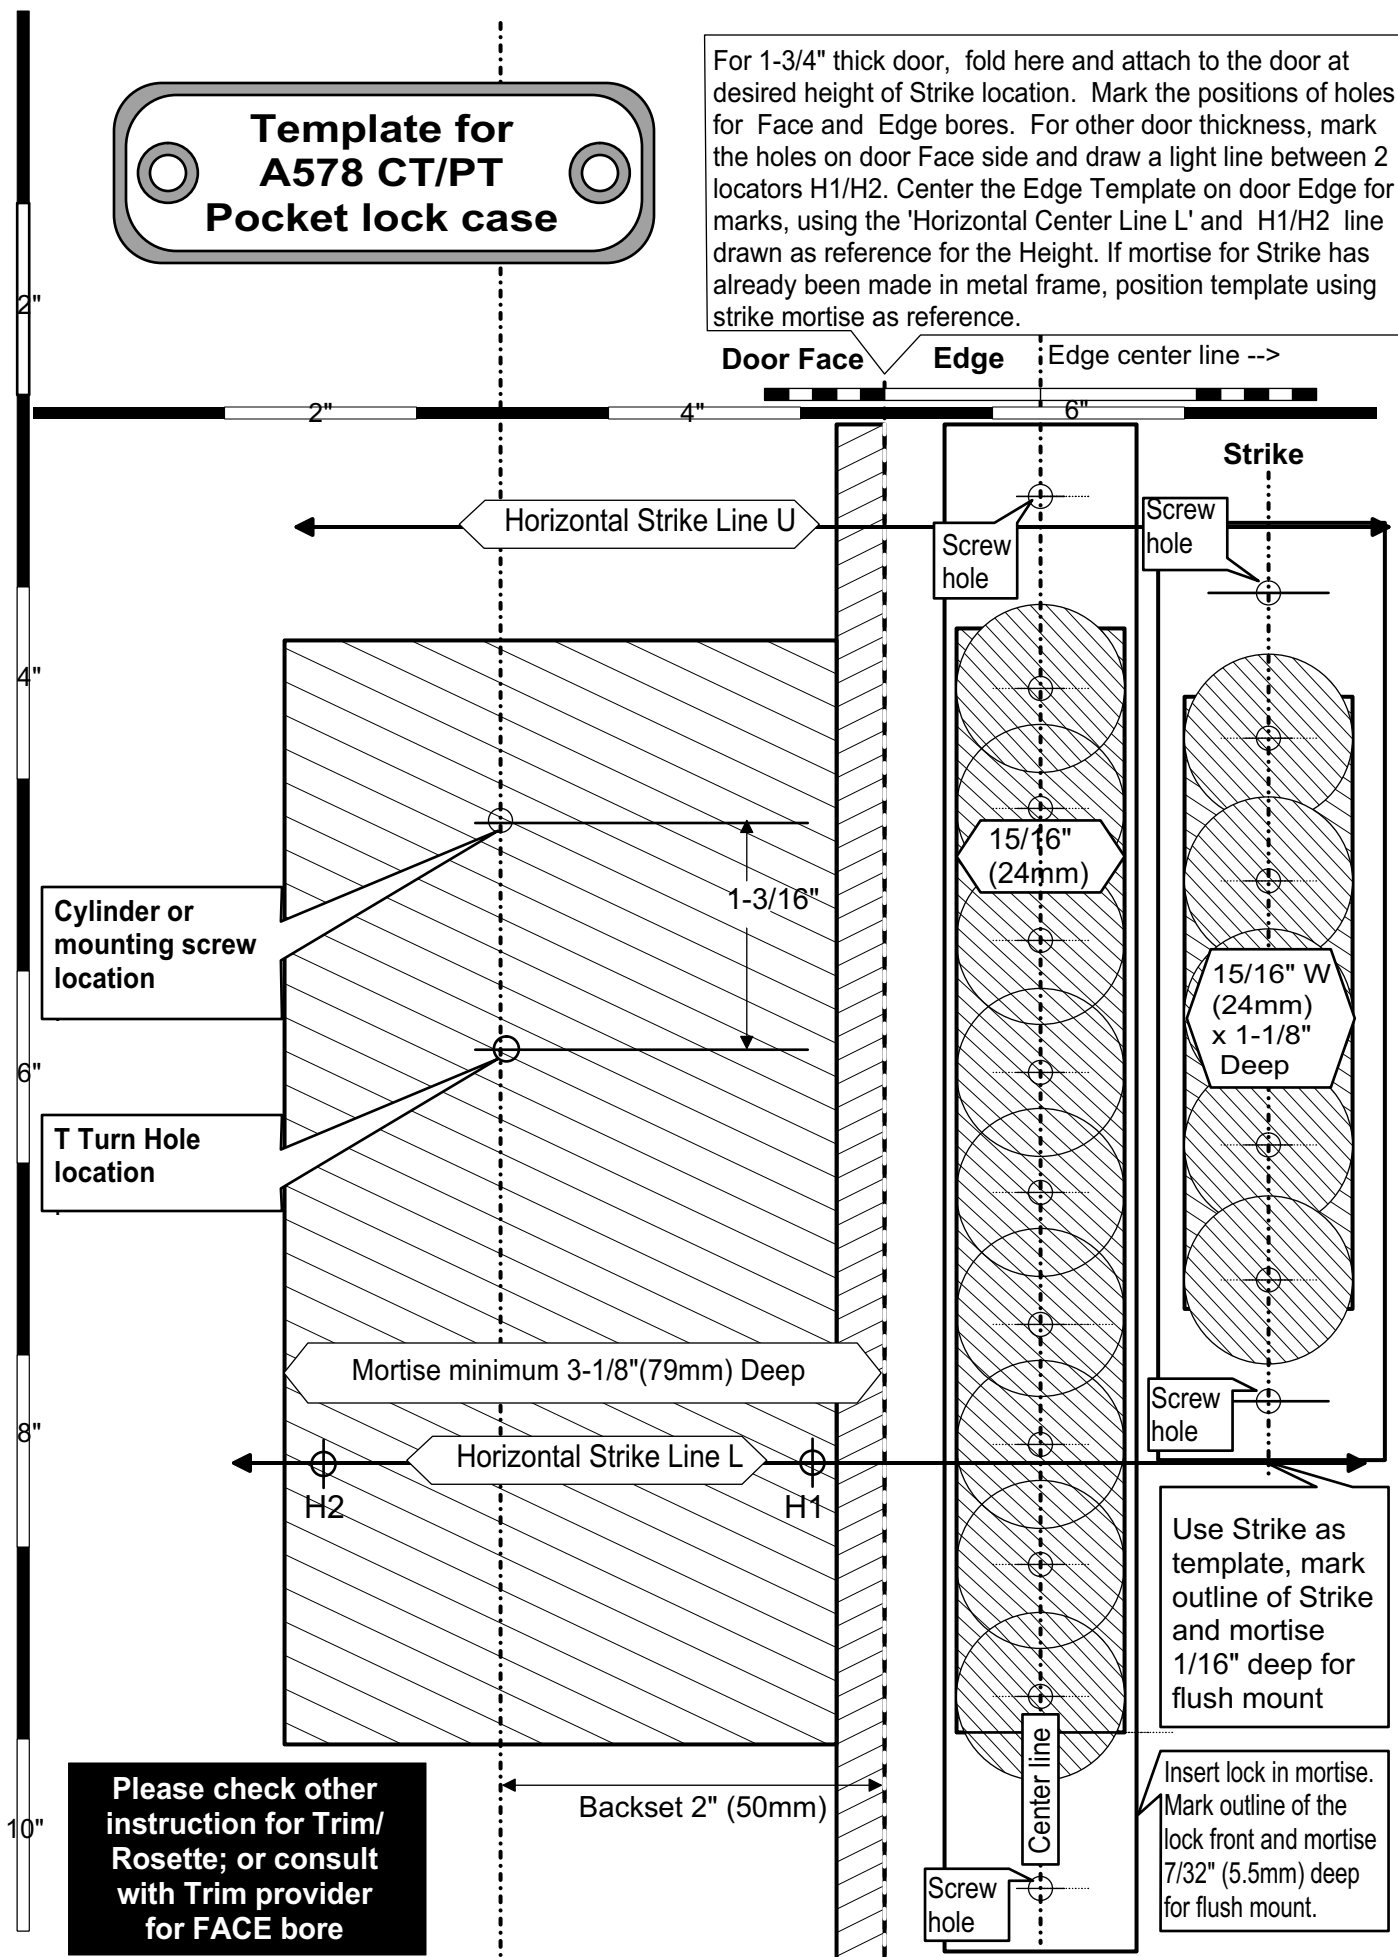


Please check other instruction for Trim/Rosette; or consult with Trim provider for FACE bore

Use Strike as template, mark outline of Strike and mortise 1/16" deep for flush mount

Insert lock in mortise. Mark outline of the lock front and mortise 7/32" (5.5mm) deep for flush mount.

For 1-3/4" thick door, fold here and attach to the door at desired height of Strike location. Mark the positions of holes for Face and Edge bores. For other door thickness, mark the holes on door Face side and draw a light line between 2 locators H1/H2. Center the Edge Template on door Edge for marks, using the 'Horizontal Center Line L' and H1/H2 line drawn as reference for the Height. If mortise for Strike has already been made in metal frame, position template using strike mortise as reference.

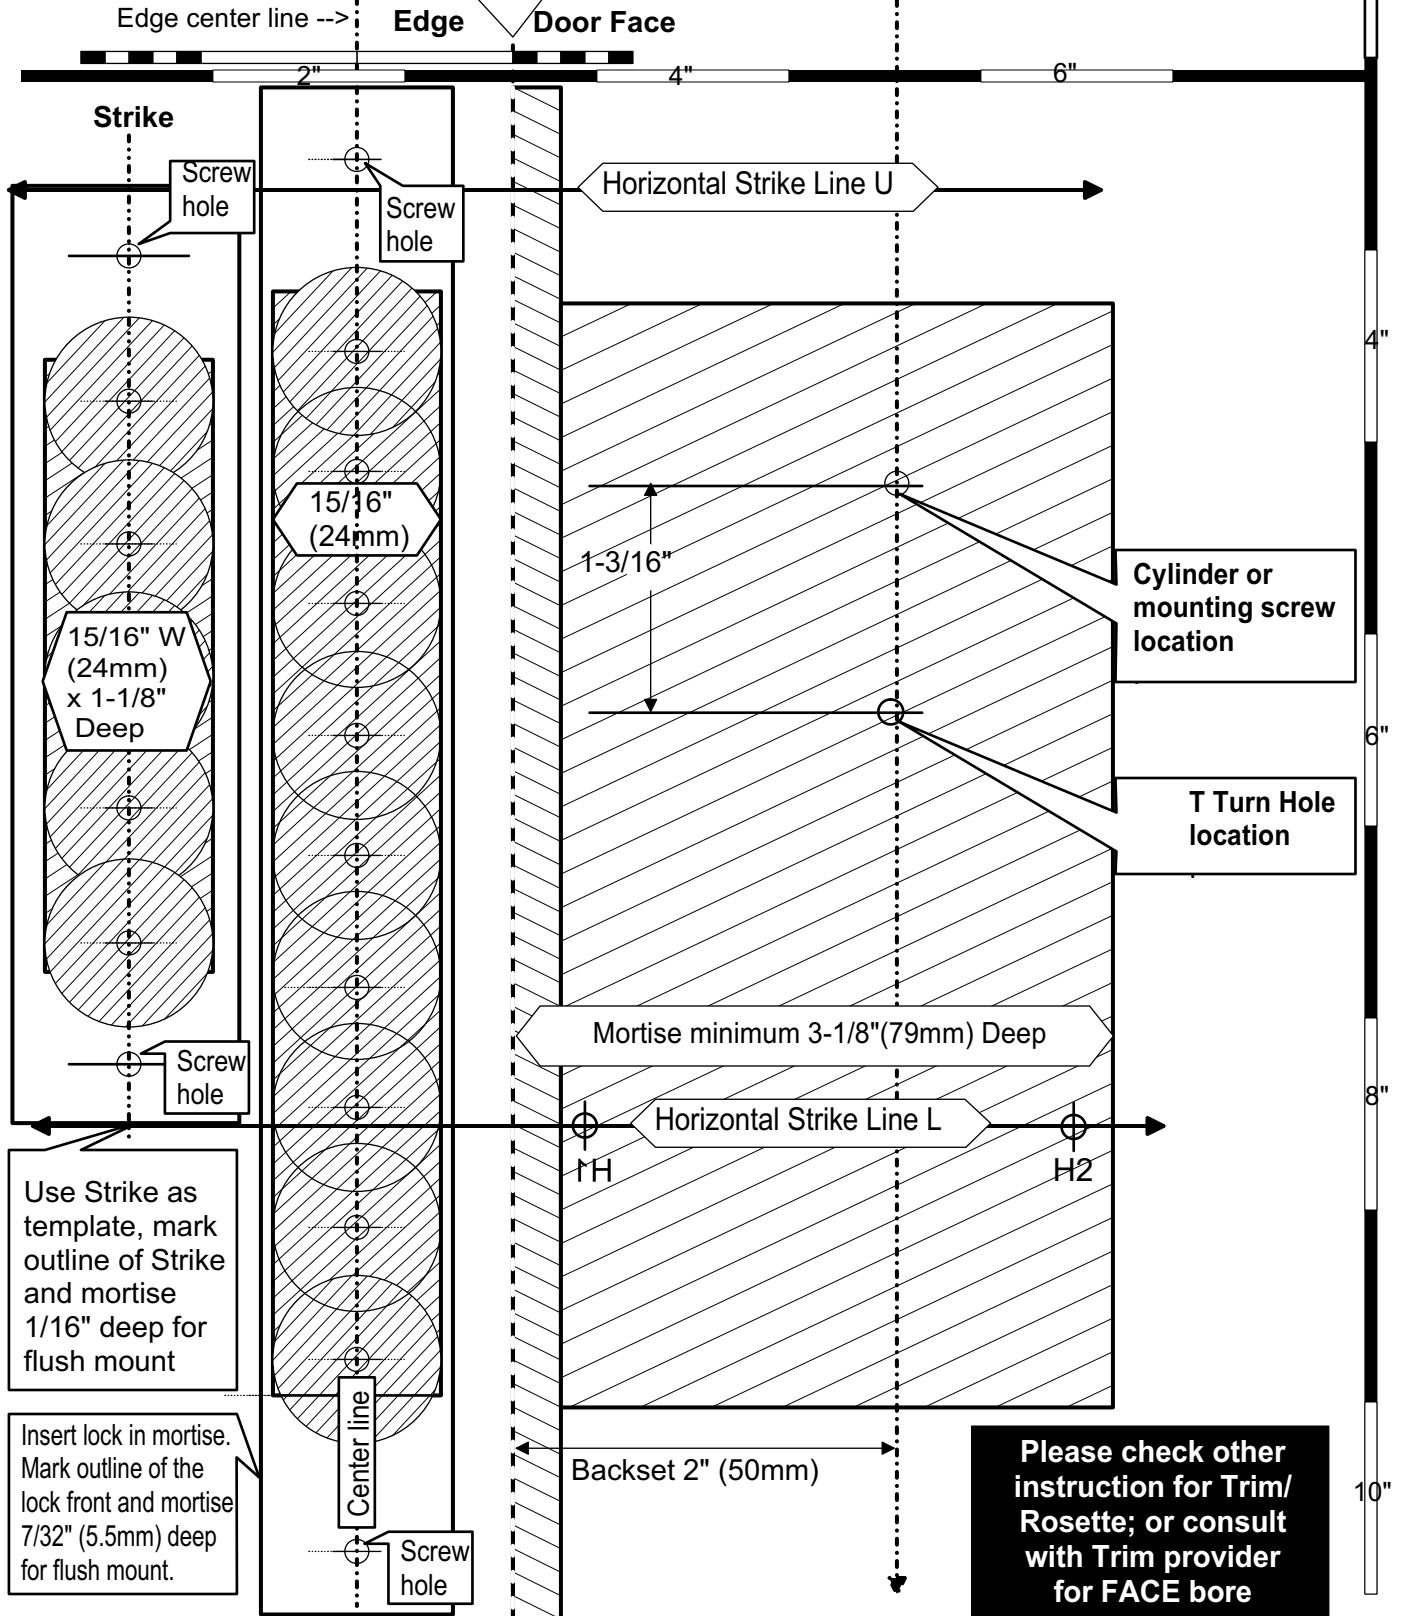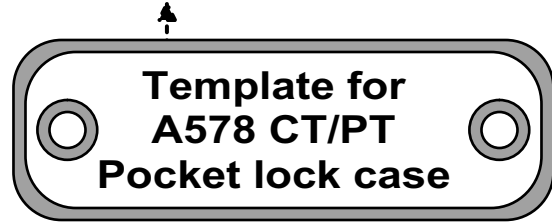

Use Strike as template, mark outline of Strike and mortise 1/16" deep for flush mount

Insert lock in mortise. Mark outline of the lock front and mortise 7/32" (5.5mm) deep for flush mount.

Please check other instruction for Trim/Rosette; or consult with Trim provider for FACE bore