

Installation Template for
☐ G301.G308,G315,G317 ☐
Mortise Lock(85mm C~C)

10"
8"
6"
4"
2"

Face bore
 Check trim/lever
 set menu for
 holes to be drilled

Backset 45mm
 Backset 40mm
 Backset 35mm
 Backset 30mm
 Backset 25mm

Through
 bolt hole x 3
 dia 1/2"

Lever hole
 dia 7/8"

92mm

Backset 25mm drill 1-3/4" deep
 Backset 30mm drill 1-7/8" deep
 Backset 35mm drill 2-1/8" deep
 Backset 40mm drill 2-3/8" deep
 Backset 45mm drill 2-5/8" deep

Line for Strike

dia 7/8"
 Cylinder
 hole

Face bore/ Entrance function illustrated.
 Please read this *Template* and the *Trim set*
Installation menu carefully before drilling
 and mortising the door.

Door thickness
 1-3/8" 1-3/4" 2-1/4"

Line for Strike

Edge bore


Check the drawing
 measurements if
 reprint

dia 3/4"

bt ins- g300 / 111115

7" 5" 3" 1"

Installation Template for
☐ G301,G308,G315,G317 ☐
Mortise Lock(85mm C~C)

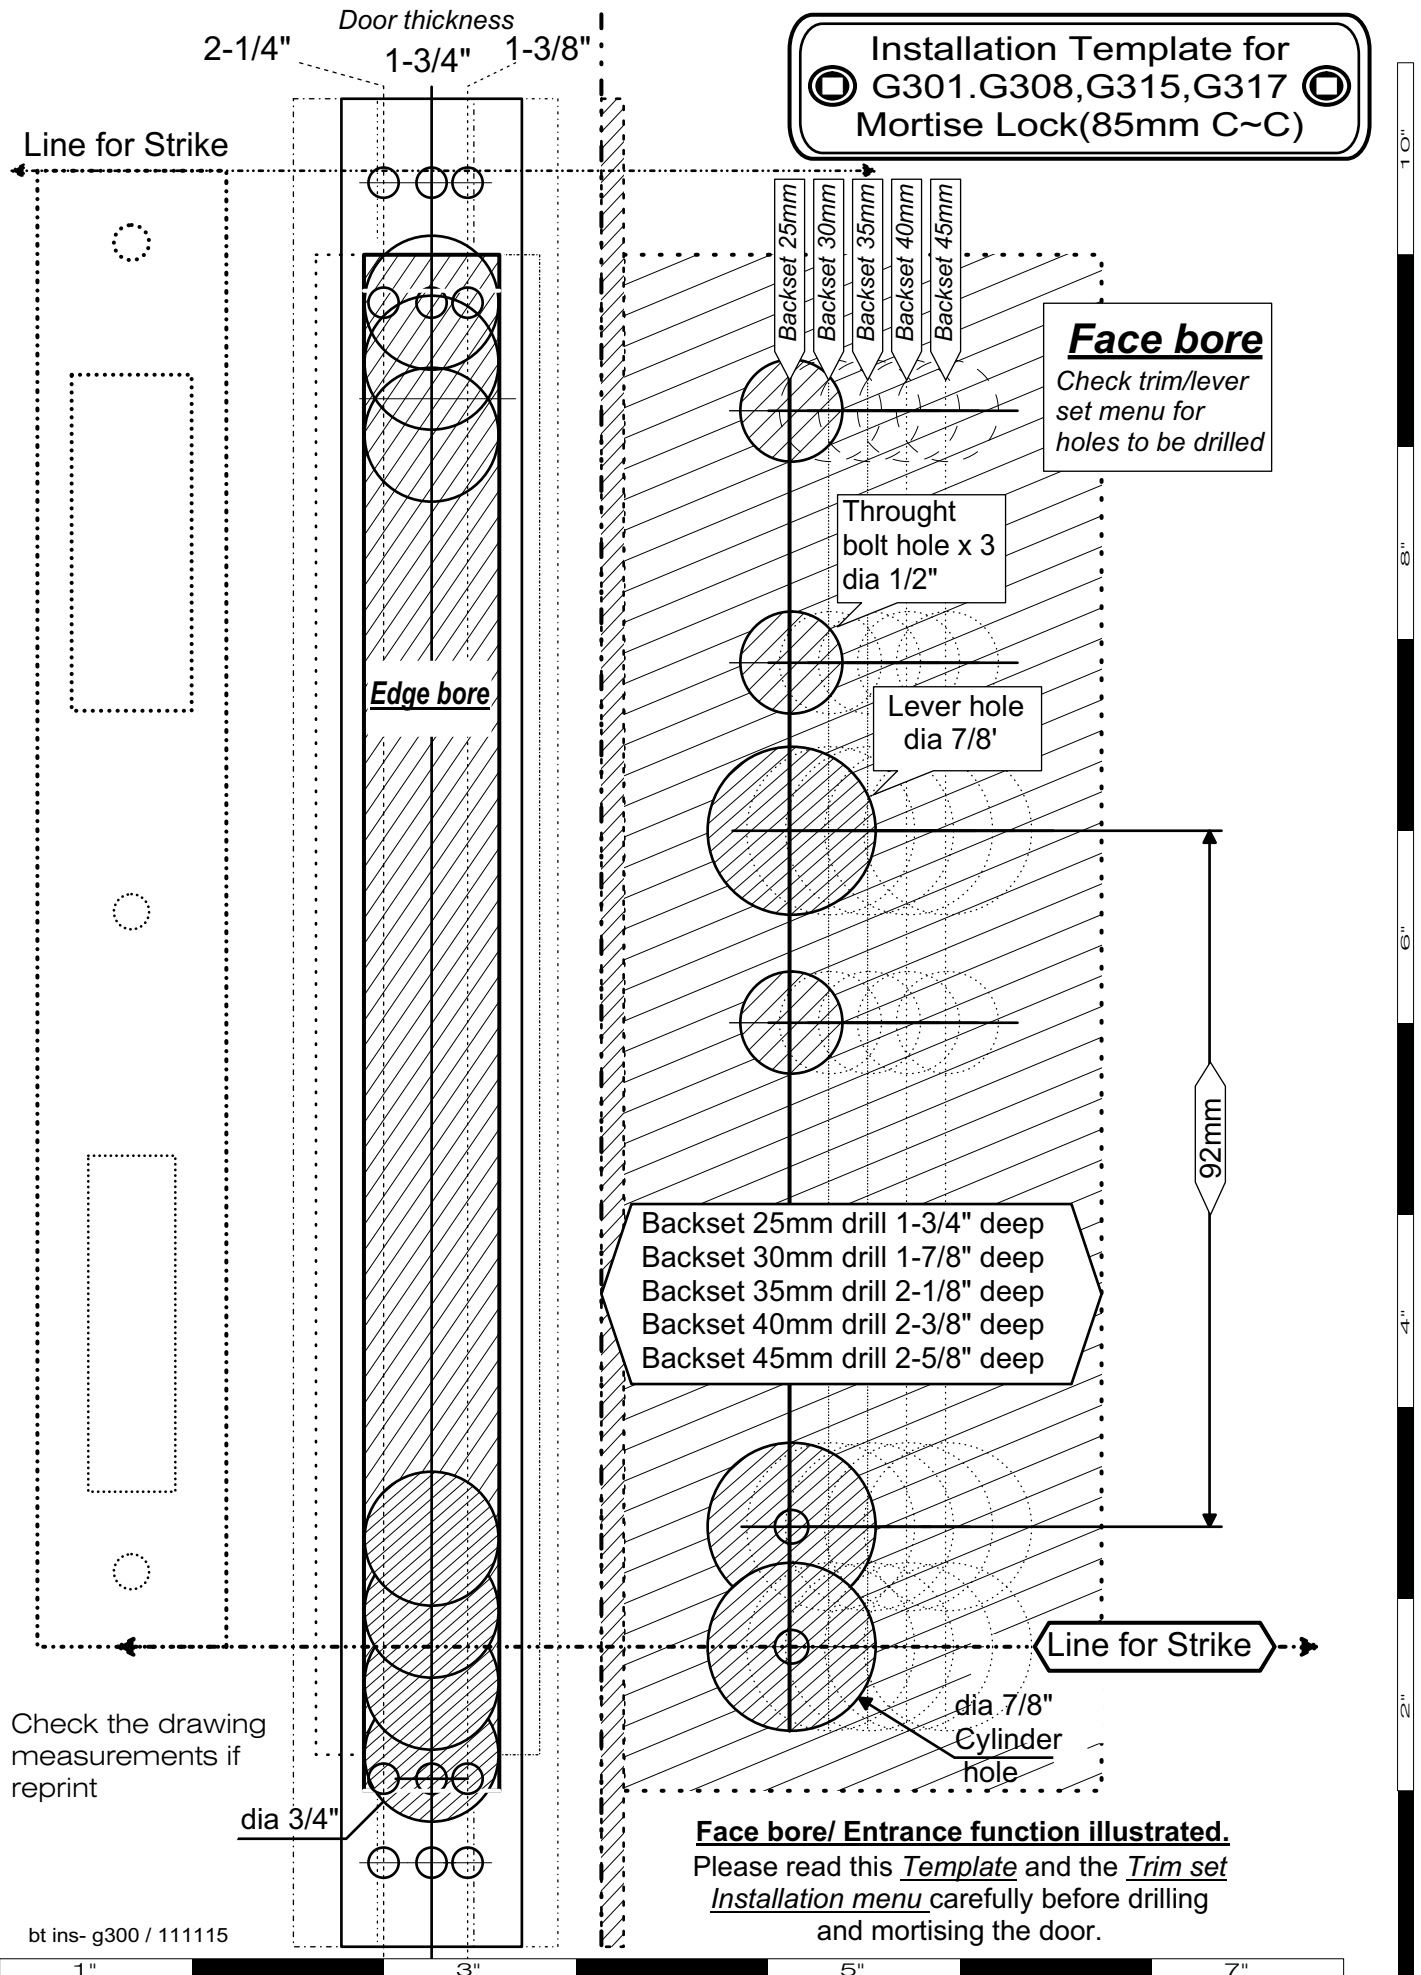

Face bore
 Check trim/lever set menu for holes to be drilled

- Backset 25mm drill 1-3/4" deep
- Backset 30mm drill 1-7/8" deep
- Backset 35mm drill 2-1/8" deep
- Backset 40mm drill 2-3/8" deep
- Backset 45mm drill 2-5/8" deep

Check the drawing measurements if reprint

Face bore/ Entrance function illustrated.
 Please read this Template and the Trim set Installation menu carefully before drilling and mortising the door.